





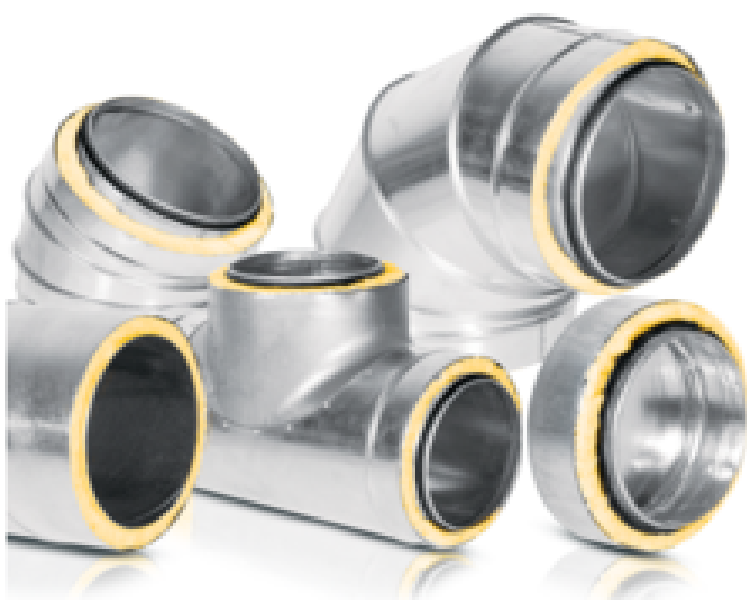

Dimensions

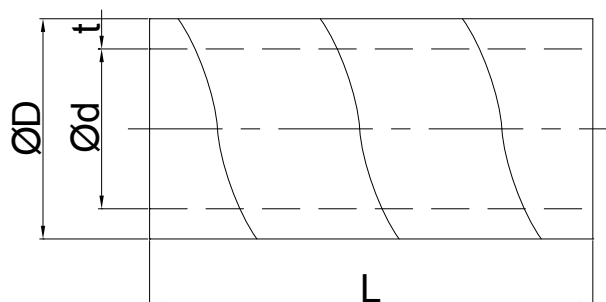

isolation 10 mm

Ød [mm]	ØD [mm]	weight [kg/m]	Ød [mm]	ØD [mm]	weight [kg/m]
80	100	2,5	140	160	4,0
100	125	3,0	160	180	4,5
125*	160	4,0	180	200	5,0

*standard SPRI-10-125 is made of the outer jacket of diameter d = 160mm, it is possible to order the execution of the outer jacket with a diameter of 150mm, then the sign is as follows: SPRI-10-125-150

isolation 16 mm

Ød [mm]	ØD [mm]	weight [kg/m]	Ød [mm]	ØD [mm]	weight [kg/m]
80	112	2,9	160	192	5,4
100	132	3,5	200	232	6,6
125	157	4,3	250	280	8,1

isolation 25 mm

Ød [mm]	ØD [mm]	weight [kg/m]	Ød [mm]	ØD [mm]	weight [kg/m]
100	150	3,6	250	300	8,5
125	180	4,7	280	315	9,0
140	200	5,0	300	355	11,4
150	200	5,1	315	355	11,5
160	224	5,9	355	400	14,1
180	224	6,3	400	450	15,9
200	250	6,6	450	500	17,3
224	280	7,7	500	560	21

isolation 50 mm


Ød [mm]	ØD [mm]	weight [kg/m]	Ød [mm]	ØD [mm]	weight [kg/m]
100	200	4,9	250	355	11,5
125	224	6,0	280	400	12,9
140	250	6,6	300	400	13,5
150	250	6,7	315	400	13,6
160	280	7,4	355	450	16,5
180	280	7,9	400	500	18
200	300	8,6	450	560	22,3
224	315	9,3	500	600	23,3



Ordering

Product code: **BSLI - 25 - 200 - 90**

type
isolation
Ød
angle




isolation 10 mm

Ød [mm]	ØD [mm]	L [mm]	weight [kg]	Ød [mm]	ØD [mm]	L [mm]	weight [kg]
80	100	100	0,6	140	160	140	1,6
100	125	100	0,8	160	180	160	2,0
125*	160	125	1,5	180	200	180	2,2

*standard BSLI-10-125-90 is made of the outer jacket of diameter d=160mm, it is possible to order the execution of the outer jacket with a diameter of 150mm, then the sign is as follows: BSLI-10-125-150-90

isolation 16 mm

Ød [mm]	ØD [mm]	L [mm]	weight [kg]	Ød [mm]	ØD [mm]	L [mm]	weight [kg]
80	112	100	0,7	160	192	160	2,1
100	132	100	0,9	200	232	200	3,2
125	157	125	1,3	250	280	250	4,7

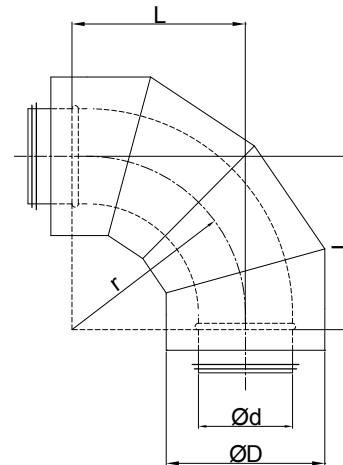

isolation 25 mm

Ød [mm]	ØD [mm]	weight [kg]	Ød ₁ [mm]	ØD [mm]	weight [kg]
100	150	1,5	250	300	6,0
125	180	2,1	280	315	7,6
140	200	2,6	300	355	9,3
150	200	2,7	315	355	10,4
160	224	2,9	355	400	12,7
180	224	3,0	400	450	15,7
200	250	4,0	450	500	23,2
224	280	4,8	500	560	24,0

isolation 50 mm


Ød [mm]	ØD [mm]	weight [kg]	Ød ₁ [mm]	ØD [mm]	weight [kg]
100	200	2,4	250	355	9,3
125	224	3,1	280	400	12,1
140	250	4,1	300	400	12,3
150	250	4,2	315	400	13,6
160	250	5,0	355	450	16,9
180	280	5,2	400	500	20,5
200	300	5,9	450	560	25,1
224	315	7,4	500	600	35,9



Ordering

Product code: **BSLI - 25 -200 - 45**

type
isolation
Ød
angle




isolation 10 mm

Ød [mm]	ØD [mm]	L [mm]	weight [kg]	Ød [mm]	ØD [mm]	L [mm]	weight [kg]
80	100	41	0,4	140	160	58	1,1
100	125	41	0,6	160	180	75	1,2
125*	160	52	1,0	180	200	80	1,4

*standard BSLI-10-125-45 is made of the outer jacket of diameter d=160mm, it is possible to order the execution of the outer jacket with a diameter of 150mm, then the sign is as follows: BSLI-10-125-150-45

isolation 16 mm

Ød [mm]	ØD [mm]	L [mm]	weight [kg]	Ød [mm]	ØD [mm]	L [mm]	weight [kg]
80	112	41	0,5	160	192	66	1,1
100	132	41	0,6	200	232	83	1,8
125	157	52	0,8	250	280	104	2,6

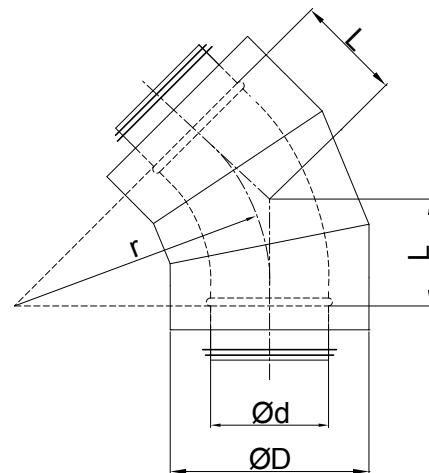


isolation 25 mm

Ød [mm]	ØD [mm]	weight [kg]	Ød [mm]	ØD [mm]	weight [kg]
100	150	1,0	250	300	3,7
125	180	1,3	280	315	4,6
140	200	1,6	300	355	5,6
150	200	1,7	315	355	6,2
160	224	1,9	355	400	8,1
180	224	2,0	400	450	10,0
200	250	2,4	450	500	11,6
224	280	3,3	500	560	14,4

isolation 50 mm

Ød [mm]	ØD [mm]	weight [kg]	Ød [mm]	ØD [mm]	weight [kg]
100	200	1,5	250	355	5,6
125	224	1,8	280	400	7,3
140	250	2,5	300	400	7,5
150	250	2,6	315	400	8,3
160	250	3,1	355	450	10,1
180	280	3,2	400	500	12,1
200	300	3,6	450	560	14,7
224	315	4,5	500	600	20,6



Ordering


Product code: **RSCLLI - 25 - 200 - 125**

type
isolation

$\varnothing d_1$
 $\varnothing d_2$

isolation 10 mm					
$\varnothing d_1$ [mm]	$\varnothing d_2$ [mm]	$\varnothing D_1$ [mm]	$\varnothing D_2$ [mm]	L [mm]	waga [kg]
125*	100	160	125	42	0,3
160	100	180	125	60	0,4
160	125	180	160	41	0,5
200	100	224	125	45	0,6
200	125	224	160	63	0,7
200	160	224	180	45	0,5
250	125	280	160	51	1,0
250	160	280	180	74	1,0
250	200	280	224	53	0,9

*standard RSCLLI-10-125-15 is made of the outer jacket of diameter $d=160$ mm, it is possible to order the execution of the outer jacket with a diameter of 150mm, then the sign is as follows: RSCLLI-10-125-150-15

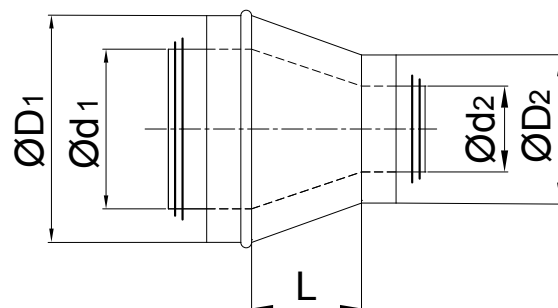

isolation 16 mm					
$\varnothing d_1$ [mm]	$\varnothing D_1$ [mm]	$\varnothing d_2$ [mm]	$\varnothing D_2$ [mm]	L [mm]	waga [kg]
125	100	157	132	42	0,5
160	100	192	132	60	0,6
160	125	192	157	41	0,7
200	100	232	132	45	0,8
200	125	232	157	63	0,8
200	160	232	192	45	0,7
250	125	280	157	51	1,1
250	160	280	192	74	1,1
250	200	280	232	53	1,0

isolation 25mm					
$\varnothing d_1$ [mm]	$\varnothing D_1$ [mm]	$\varnothing d_2$ [mm]	$\varnothing D_2$ [mm]	L [mm]	waga [kg]
125	100	180	150	64	0,9
140	100	200	150	85	1
140	125	200	180	51	0,9
150	100	200	150	99	1,2
150	125	200	180	64	1
150	140	200	200	44	0,9
160	100	224	150	112	1,3
160	125	224	180	78	1,2
160	140	224	200	57	1,1
160	150	224	200	44	1
200	100	250	150	167	2
200	125	250	180	133	1,9
200	140	250	200	112	1,8
200	150	250	200	99	1,6
200	160	250	224	85	1,6
200	180	250	224	58	1,4
224	100	280	150	200	2,4

Dimensions

isolation 25 mm					
$\varnothing d_1$ [mm]	$\varnothing d_2$ [mm]	$\varnothing D_1$ [mm]	$\varnothing D_2$ [mm]	L [mm]	waga [kg]
224	125	280	180	166	2,2
224	140	280	200	145	2,3
224	150	280	200	132	2,2
224	160	280	224	118	2,2
224	180	280	224	90	2
224	200	280	250	63	1,9
250	100	300	150	236	3,1
250	125	300	180	202	3
250	140	300	200	181	2,8
250	150	300	200	167	2,7
250	160	300	224	154	2,7
250	180	300	224	126	2,4
250	200	300	250	99	2,4
250	224	300	280	66	2,2
280	125	315	180	243	3,9
280	140	315	200	222	3,8
280	150	315	200	209	3,6
280	160	315	224	195	3,5
280	180	315	224	167	3,3
280	200	315	250	140	3,2
280	224	315	280	107	3
280	250	315	300	71	2,8
300	125	355	180	270	4,5
300	140	355	200	250	4,4
300	150	355	200	236	4,3
300	160	355	224	222	4,2
300	180	355	224	195	3,9
300	200	355	250	167	3,8
300	224	355	280	135	3,7
300	280	355	315	58	3,3
315	100	355	150	310	5,2
315	125	355	180	291	5,1
315	140	355	200	270	5,1
315	150	355	200	257	5,5
315	160	355	224	243	4,8
315	180	355	224	216	4,5
315	200	355	250	188	4,4
315	224	355	280	155	4
315	250	355	300	119	3,8

Dimensions

isolation 25 mm					
$\varnothing d_1$ [mm]	$\varnothing d_2$ [mm]	$\varnothing D_1$ [mm]	$\varnothing D_2$ [mm]	L [mm]	waga [kg]
315	280	355	315	78	3,5
315	300	355	355	51	3,2
355	160	400	224	298	6,4
355	180	400	224	270	6,1
355	200	400	250	243	5,8
355	224	400	280	224	5,7
355	250	400	300	174	5,3
355	280	400	315	133	4,9
355	300	400	355	106	4,6
355	315	400	355	85	4,4
400	160	450	224	365	8,3
400	180	450	224	337	7,9
400	200	450	250	310	7,7
400	224	450	280	277	7,4
400	250	450	300	241	7,1
400	280	450	315	200	6,8
400	300	450	355	172	6,4
400	315	450	355	152	6,1
400	355	450	400	97	5,6
450	200	500	250	378	9,8
450	224	500	280	346	9,5
450	250	500	300	310	9,1
450	280	500	315	269	8,7
450	300	500	355	241	8,3
450	315	500	355	221	7,8
450	355	500	400	166	7,3
450	400	500	450	109	6,7
500	224	560	280	414	11,6
500	250	560	300	378	11,3
500	280	560	315	337	10,9
500	300	560	355	310	10,5
500	315	560	400	289	10,2
500	355	560	400	234	9,5
500	400	560	450	177	8,8
500	450	560	500	109	7,8

Dimensions

isolation 50 mm					
Ød ₁ [mm]	Ød ₂ [mm]	ØD ₁ [mm]	ØD ₂ [mm]	L [mm]	waga [kg]
125	100	224	200	1,1	64
140	100	250	200	1,4	85
140	125	250	224	1,3	51
150	100	250	200	1,6	99
150	125	250	224	1,4	64
150	140	250	250	1,3	44
160	100	280	200	1,8	112
160	125	280	224	1,7	78
160	140	280	250	1,6	57
160	150	280	250	44	1,4
200	100	300	200	167	2,5
200	125	300	224	133	2,3
200	140	300	250	112	2,2
200	150	300	250	99	2,1
200	160	300	280	85	2
200	180	300	280	58	1,8
224	100	315	200	200	3,4
224	125	315	224	166	3,1
224	140	315	250	145	3
224	150	315	250	132	2,9
224	160	315	280	118	2,8
224	180	315	280	90	2,5
224	200	315	300	63	2,3
250	100	355	200	236	4,3
250	125	355	224	202	4
250	140	355	250	181	3,8
250	150	355	250	167	3,7
250	160	355	280	154	3,6
250	180	355	280	126	3,3
250	200	355	300	99	3,1
250	224	355	315	66	2,8
280	125	400	224	243	5,3
280	140	400	250	222	5,2
280	150	400	250	209	5,1
280	160	400	280	195	5
280	180	400	280	167	4,6
280	200	400	300	140	4,3
280	224	400	315	107	3,9
280	250	400	355	71	3,6
300	125	400	224	270	5,7

Dimensions

isolation 50 mm					
Ød ₁ [mm]	Ød ₂ [mm]	ØD ₁ [mm]	ØD ₂ [mm]	L [mm]	waga [kg]
300	140	400	250	250	5,6
300	150	400	250	236	5,4
300	160	400	280	222	5,3
300	180	400	280	195	5
300	200	400	300	167	4,7
300	224	400	315	135	4,6
300	250	400	355	99	4,3
315	250	400	355	4,6	119
315	280	400	400	4,2	78
315	300	400	400	3,8	51
355	160	450	280	7,7	298
355	180	450	280	7,4	270
355	200	450	300	6,9	243
355	224	450	315	6,7	224
355	250	450	355	6,0	174
355	280	450	400	5,7	133
355	300	450	400	5,3	106
355	315	450	400	5,0	85
400	160	500	280	9,9	365
400	180	500	280	9,5	337
400	200	500	300	9,1	310
400	224	500	315	8,6	277
400	250	500	355	8,3	241
400	280	500	400	7,8	200
400	300	500	400	7,2	172
400	315	500	400	6,9	152
400	355	500	450	6,1	97
450	200	560	300	11,5	378
450	224	560	315	11,2	346
450	250	560	355	10,6	310
450	280	560	400	10,0	269
450	300	560	400	9,5	241
450	315	560	400	9,1	221
450	355	560	450	8,2	166
450	400	560	500	7,4	109
500	200	600	300	16,8	447
500	224	600	315	15,7	414
500	250	600	355	378	15,2
500	280	600	400	337	15,0
500	300	600	400	310	13,9

IZOL®system pre-insulated reducers


RSCLLI

Dimensions

<i>isolation 50 mm</i>					
$\varnothing d_1$ [mm]	$\varnothing d_2$ [mm]	$\varnothing D_1$ [mm]	$\varnothing D_2$ [mm]	<i>L</i> [mm]	<i>waga</i> [kg]
500	315	600	400	289	13,4
500	355	600	450	234	12,1
500	400	600	500	177	10,9
500	450	600	560	109	9,2




type
isolation
 $\varnothing d_1$
 $\varnothing d_2$



isolation 10 mm

$\varnothing d_1$ [mm]	$\varnothing d_2$ [mm]	$\varnothing D_1$ [mm]	$\varnothing D_2$ [mm]	L [mm]	H [mm]	waga [kg]
100	100	125	125	180	86	0,8
125*	100	160	125	180	100	1,0
125*	125	160	160	210	100	1,1
140	100	160	125	180	105	0,9
140	125	160	160	180	105	1,0
140	140	160	160	200	105	1,1
160	100	180	125	170	115	1,1
160	125	180	160	170	115	1,2
160	140	180	160	210	115	1,0
160	160	180	180	210	115	1,2
180	100	200	125	150	125	1,4
180	125	200	160	225	125	1,5
180	140	200	160	240	125	1,4
180	160	200	180	310	125	1,5
180	180	200	200	300	125	1,6

*standard TPCLI-10-125-15 is made of the outer jacket of diameter $d=160$ mm, it is possible to order the execution of the outer jacket with a diameter of 150mm, then the sign is as follows: TPCLI-10-125-150-15

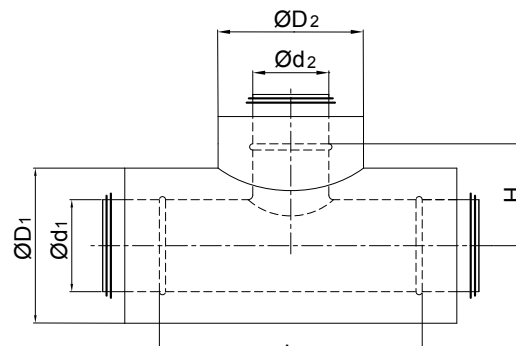

isolation 16 mm

$\varnothing d_1$ [mm]	$\varnothing d_2$ [mm]	$\varnothing D_1$ [mm]	$\varnothing D_2$ [mm]	L [mm]	H [mm]	waga [kg]
100	100	132	132	180	86	1,0
125	100	157	132	180	100	1,1
125	125	157	157	210	100	1,3
160	100	192	132	182	116	1,5
160	125	192	157	210	116	1,6
160	160	192	192	240	116	1,7
200	100	232	132	182	136	1,6
200	125	232	157	210	136	1,8
200	160	232	192	240	136	2,1
200	200	232	232	280	136	2,6
250	100	282	132	180	161	2,0
250	125	282	157	210	161	2,2
250	160	282	192	240	161	2,6
250	200	282	232	280	161	2,9
250	250	282	282	328	161	3,5

isolation 25 mm

$\varnothing d_1$ [mm]	$\varnothing d_2$ [mm]	$\varnothing D_1$ [mm]	$\varnothing D_2$ [mm]	L [mm]	H [mm]	waga [kg]
100	100	150	150	210	95	1,2
125	100	180	150	210	108	1,4
125	125	180	180	235	108	1,6
140	100	200	150	210	115	1,6
140	125	200	180	235	115	1,7
140	140	200	200	250	115	1,8
150	100	200	150	210	120	1,4
150	125	200	180	235	120	1,8
150	140	200	200	250	120	1,8

isolation 25 mm

$\varnothing d_1$ [mm]	$\varnothing d_2$ [mm]	$\varnothing D_1$ [mm]	$\varnothing D_2$ [mm]	L [mm]	H [mm]	waga [kg]
150	150	200	200	260	120	1,9
160	100	224	150	210	125	1,9
160	125	224	180	235	125	2,0
160	140	224	200	250	125	2,2
160	150	224	200	260	125	2,2
160	160	224	224	270	125	2,3
180	100	224	150	210	135	2,5
180	125	224	180	235	135	2,9
180	140	224	200	250	135	3,2
180	150	224	200	260	135	3,2
180	160	224	224	270	135	3,4
180	180	224	224	290	135	3,4
200	100	250	150	210	145	3,0
200	125	250	180	235	145	3,6
200	140	250	200	250	145	3,5
200	150	250	200	260	145	3,5
200	160	250	224	270	145	4,1
200	180	250	224	290	145	4,2
200	200	250	250	310	145	4,7
224	100	280	150	210	157	3,5
224	125	280	180	235	157	4,2
224	140	280	200	250	157	3,8
224	150	280	200	260	157	4,2
224	160	280	224	270	157	4,6
224	180	280	224	290	157	3,7
250	100	280	150	210	170	3,9
250	125	280	180	235	170	4,5
250	140	280	200	250	170	4,6
250	150	280	200	260	170	4,7
250	160	280	224	270	170	4,9
250	180	280	224	290	170	5
250	200	280	250	310	170	4
250	250	280	300	360	170	5,4
280	100	315	150	230	185	4,6
280	125	315	180	255	185	4,9
280	140	315	200	270	185	5,3
280	150	315	200	280	185	5,5
280	160	315	224	290	185	5,6
280	180	315	224	310	185	5,7

isolation 25 mm

$\varnothing d_1$ [mm]	$\varnothing d_2$ [mm]	$\varnothing D_1$ [mm]	$\varnothing D_2$ [mm]	L [mm]	H [mm]	waga [kg]
280	200	315	250	330	185	5,7
300	100	355	150	230	195	5,1
300	125	355	180	255	195	5,4
300	140	355	200	270	195	5,7
300	150	355	200	280	195	5,8
300	160	355	224	290	195	6,4
300	180	355	224	310	195	5,9
300	200	355	250	330	195	6,3
300	250	355	300	380	195	7,1
315	100	355	150	230	203	5,7
315	125	355	180	255	203	6
315	140	355	200	270	203	6,4
315	150	355	200	280	203	6,3
315	160	355	224	290	203	6,8
315	180	355	224	310	203	7
315	200	355	250	330	203	7,1
315	250	355	300	380	203	7,8
355	160	400	224	290	222	7,4
355	200	400	250	330	222	7,9
400	200	450	250	330	245	9,5
450	160	500	224	290	270	9,9
450	200	500	250	330	270	10,5
500	200	560	250	330	295	12,8

isolation 50 mm

$\varnothing d_1$ [mm]	$\varnothing d_2$ [mm]	$\varnothing D_1$ [mm]	$\varnothing D_2$ [mm]	L [mm]	H [mm]	waga [kg/m]
100	100	200	200	281	125	2,5
125	100	224	200	346	137	3,2
125	125	224	224	346	137	3,4
140	100	250	200	306	150	3,5
140	125	250	224	350	150	4,1
140	140	250	250	307	150	3,9
150	100	250	200	306	150	3,7
150	125	250	224	350	150	4,2
150	140	250	250	307	150	3,9
150	150	205	250	307	150	3,9
160	100	280	200	306	165	4,0
160	125	280	224	350	165	4,5
160	140	280	250	380	165	4,5

isolation 50 mm						
$\varnothing d_1$ [mm]	$\varnothing d_2$ [mm]	$\varnothing D_1$ [mm]	$\varnothing D_2$ [mm]	L [mm]	H [mm]	waga [kg]
160	150	280	250	380	165	4,5
180	100	280	200	306	165	4,1
180	125	280	224	350	165	4,6
180	140	280	250	380	165	4,6
180	150	280	250	380	165	4,6
200	100	300	200	306	175	4,4
200	125	300	224	350	172	4,9
200	140	300	250	350	175	4,9
200	150	300	250	350	175	4,9
224	100	315	200	306	182	7,8
224	125	315	224	350	182	5,7
224	140	315	250	350	182	5,7
224	150	315	250	350	182	5,7
224	224	315	315	390	182	6,6
250	100	355	200	306	203	5,7
250	125	355	224	350	203	6,2
250	150	355	250	350	203	6,4
250	224	355	315	455	203	7,8
280	100	400	200	300	225	7,3
280	125	400	224	350	225	7,6
280	140	400	250	350	225	7,3
280	150	400	250	350	225	7,4
280	224	400	315	415	225	8,8
300	100	400	200	300	225	7
300	125	400	224	350	225	7,7
300	140	400	250	350	225	7,8
300	150	400	250	350	225	7,9
300	224	400	315	415	225	9
315	100	400	200	300	225	7,7
315	125	400	224	350	225	8,5
315	140	400	250	350	225	8,5
315	150	400	250	350	225	8,6
315	224	400	315	415	225	9,8
315	315	400	400	500	225	11,8
355	224	400	315	415	250	10,9
355	315	400	400	500	250	12,9
400	100	500	200	300	275	9,7
400	125	500	224	300	275	10,1
400	224	500	315	415	275	12,1


isolation 50 mm						
$\varnothing d_1$ [mm]	$\varnothing d_2$ [mm]	$\varnothing D_1$ [mm]	$\varnothing D_2$ [mm]	L [mm]	H [mm]	waga [kg/m]
400	315	500	400	500	275	14,4
450	100	560	200	360	305	12,1
450	315	560	400	590	305	17,9
500	100	600	200	360	340	15,5
500	315	600	400	590	340	22,6



Ordering

Product code: **MSFI - 25 - 200**

type
isolation
Ød




isolation 10 mm

Ød [mm]	ØD [mm]	weight [kg]	Ød [mm]	ØD [mm]	weight [kg]
80	100	0,2	140	160	0,3
100	125	0,25	160	180	0,35
125*	160	0,3	180	200	0,35

isolation 16 mm

Ød [mm]	ØD [mm]	L [mm]	weight [kg]	Ød [mm]	ØD [mm]	L [mm]	weight [kg]
80	112	90	0,3	160	192	90	0,5
100	132	90	0,3	200	232	90	0,6
125	157	90	0,4	250	280	135	1,1

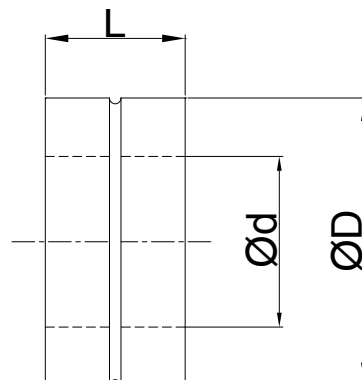


isolation 25 mm

Ød [mm]	ØD [mm]	L [mm]	weight [kg]	Ød [mm]	ØD [mm]	L [mm]	weight [kg]
100	150	90	0,4	250	300	135	1,3
125	180	90	0,5	280	315	135	1,5
140	200	90	0,5	300	355	135	1,7
150	200	90	0,5	315	355	135	1,8
160	224	90	0,6	355	400	175	2,4
180	224	90	0,6	400	450	175	3,0
200	250	135	0,9	450	500	175	3,4
224	280	135	1,0	500	560	175	3,8

isolation 50 mm

Ød [mm]	ØD [mm]	L [mm]	weight [kg]	Ød [mm]	ØD [mm]	L [mm]	weight [kg]
100	200	90	0,5	250	355	135	1,7
125	224	90	0,6	280	400	135	2,5
140	250	90	1,0	300	400	135	2,6
150	250	135	1,1	315	400	135	2,8
160	250	135	1,2	355	450	175	3,2
180	280	135	1,2	400	500	175	3,5
200	300	135	1,3	450	560	175	4,0
224	315	135	1,5	500	600	175	5,1

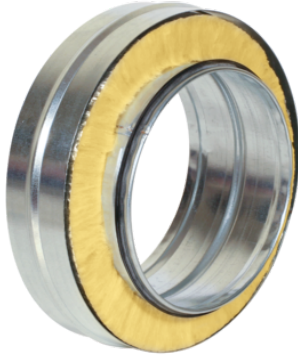

Ordering

Product code

NSLI - 25 - 200

type

isolation

Ød


isolation 10 mm

Ød [mm]	ØD [mm]	weight [kg]	Ød [mm]	ØD [mm]	weight [kg]
80	100	0,1	140	160	0,19
100	125	0,15	160	180	0,2
125*	160	0,18	180	200	0,23

*standard NSLI-10-125 is made

isolation 16 mm

Ød [mm]	ØD [mm]	weight [kg]	Ød [mm]	ØD [mm]	weight [kg]
80	112	0,3	160	192	0,5
100	132	0,3	200	232	0,6
125	157	0,4	250	280	1,1

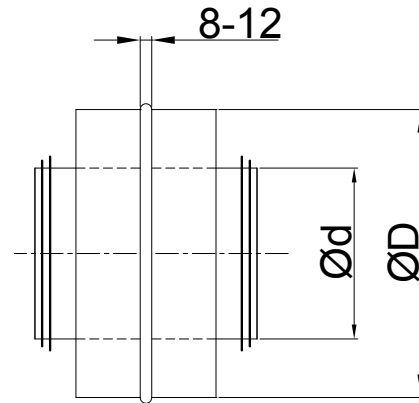

isolation 25 mm

Ød [mm]	ØD [mm]	weight [kg]	Ød [mm]	ØD [mm]	weight [kg]
100	150	0,4	250	300	1,2
125	180	0,6	280	315	1,6
140	200	0,7	300	355	1,9
150	200	0,7	315	355	1,9
160	224	0,8	355	400	2,1
180	224	0,8	400	450	2,9
200	250	0,9	450	500	3,4
224	280	1,0	500	560	3,8

isolation 50 mm

Ød [mm]	ØD [mm]	weight [kg]	Ød [mm]	ØD [mm]	weight [kg]
100	200	0,5	250	355	1,4
125	224	0,6	280	400	1,9
140	250	0,8	300	400	2,0
150	250	0,8	315	400	2,0
160	250	0,9	355	450	2,3
180	280	1,0	400	500	3,2
200	300	1,1	450	560	3,6
224	315	1,2	500	600	4,9



THÔNG TIN LIÊN HỆ

CÔNG TY TNHH ỐNG GIÓ VINA

Địa chỉ : 495 Hương Lộ 3, P Bình Hưng Hòa, Q. Bình Tân, TP.HCM

Nhà máy : Ấp 1, xã Vĩnh Lộc A , Bình Chánh , TP.HCM

Tel: 08. 6683 1021

Mã số thuế : 0313060173

Hot line : 0987 703 199 (Mr Sơn)

Website : www.onggiovina.com

<<http://www.onggiovina.com>>

Email : onggiovina@gmail.com